
Specialty Linear Shaft Motor

Scaleless SL Motor: Linear Motor with Built-In Encoder

- Line Driver output •
- Built in Interpolator
- Real-time Single processing
- High dynamics
- Excellent force to volume ratio
- No residual force present

The Scaleless SL Motor is a tubular linear motor with a built-in Linear Encoder. The simple design features just two parts, the shaft (magnets) and forcer (coils). In addition to the coils, the forcer also contains the integrated linear encoder and hall sensors. The stainless steel shaft has the scale for the linear encoder integrated into a single unit.

The Scaleless SL Motor is non-contact. Since the coil completely wraps around the magnets, all the magnetic flux is efficiently used. This allows for a large 0.5 mm nominal annular air gap that is noncritical, meaning there is no variation in force as the gap varies over the stroke of the device, or if the shaft is turned in the forcer.

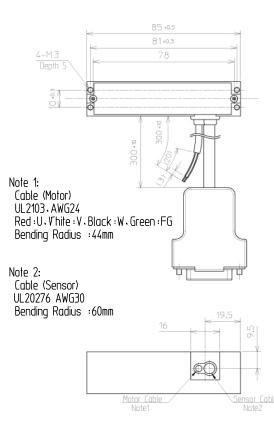

- Non-magnetic aluminum housing
- Compact and robust construction
- No lubrication required
- Simple installation and configuration
- Repeat accuracy: $\pm 1 \text{ count } (5 \mu \text{m})$


The absence of residual static force and the excellent relationship between the linear force and current make these motors ideal for use in micro-positioning applications. Position control of the Scaleless SL Motor is made possible by the built-in Linear Encoder.

An integrated solution, the Scaleless SL Motor makes integration of a linear motion a very simple matter into a wide variety of applications



JPM

in markets such as medical devices, laboratory equipment, instrumentation, factory automation and robotics, to name only a few.




*Encoder	SL083	
Power Supply Voltage	DC5V ±5%	
Consumption Current	Max.25mA	
Output Circuit	Line Driver	
Resolution	5 µm	
Signal Cycle	20 µm	
Max. Travel Speed	4m/s	

*Hall Sensor	SL083
Power Supply Voltage	DC5V ±5%
Consumption Current	Max.12mA
Output Circuit	Open Collector (24V, Max.20mA)

Specs	SL083
Continuous Force	2.9N
Continuous Current	0.9Arms
Acceleration Force	11.5N
Acceleration Current	3.6Arms
Force Constant	3.2N/Arms
Back EMF	1.1V/m/s
Resistance	$6.8\Omega\pm5\%$
Inductance	1.03mH ±5%
Max Phase Temp.	80° C (at case)
^{ced} Magnetic Pole Pitch	30mm (N-N)
RV0 69.com	Max.130g

Toll = retencoderand that sess poycer supply voltage are internally isolated Toll Free Fax: 877-378-0249 sales@servo2go.com www.servo2go.com



Pin	Signal
1	A+
2	A-
3	NC
4	B+
5	B-
6	U (Hall Sensor)
7	V (Hall Sensor)
8	W (Hall Sensor)
9	GND1
10	+5V VCC
11	Z+
12	Z-
13	NC Sold &
14	GND2 (Hall Sensor)
15	+5V (Hall Sensor)