

DigiFlex[®] Performance[™] Servo Drive

DZXRALTE-008L080

Description

The DZXRALTE-008L080 digital servo drive is designed to drive brushed and brushless servomotors from a compact form factor ideal for embedded applications. This fully digital drive operates in torque, velocity, or position mode and employs Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The drive can be configured for a variety of external command signals. Commands can also be configured using the drive's built-in Motion Engine, an internal motion controller used with distributed motion applications. In addition to motor control, this drive features dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

The DZXRALTE-008L080 features a RS-232 interface for drive configuration and setup as well as a RS-485 interface for drive networking. Drive commissioning is accomplished using DriveWare[®] 7, available for download at <u>www.a-m-c.com</u>. All drive and motor parameters are stored in non-volatile memory.

The DZXRALTE-008L080 conforms to the following specifications and is designed to the Environmental Engineering Considerations as defined in MIL-STD-810F.

Extended Environment Performance		
Ambient Temperature	-40°C to +75°C (-40°F to +167°F)	
Storage Temperature	-50°C to +100°C (-58°F to +212°F)	
Thermal Shock	-40°C to +75°C (-40°F to +167°F) in 2 min.	
Relative Humidity	0 to 95% Non-Condensing	
Vibration	30 Grms for 5 min. in 3 axes	

- Four Quadrant Regenerative Operation
- Space Vector Modulation (SVM) Technology
- Fully Digital State-of-the-art Design
- Programmable Gain Settings
- Fully Configurable Current, Voltage, Velocity and Position Limits

MODES OF OPERATION

- Current
- Hall Velocity
- Position
- Velocity

COMMAND SOURCE

- PWM and Direction
- Encoder Following
- Over the Network
- ±10 V Analog
- 5V Step and Direction
- Sequencing
- Indexing
- Jogging

FEEDBACK SUPPORTED

- Halls
- Incremental Encoder
- ±10 VDC Position
- Auxiliary Incremental Encoder

Power Ran	ge
Peak Current	8 A (5.7 A _{RMS})
Continuous Current	4 A (4 A _{RMS})
Supply Voltage	10 - 80 VDC





- PIDF Velocity Loop
- PID + FF Position Loop
- Compact Size, High Power Density
- 12-bit Analog to Digital Hardware
- On-the-Fly Mode Switching
- On-the-Fly Gain Set Switching

INPUTS/OUTPUTS

Features

- 2 High Speed Captures
- 1 Programmable Analog Input (12-bit Resolution)
- 2 Programmable Digital Inputs (Differential)
- 3 Programmable Digital Inputs (Single-Ended)
- 3 Programmable Digital Outputs (Single-Ended)


AGENCY APPROVALS & COMPLIANCE CONSIDERATIONS

- RoHS
- MIL-STD-810F (as stated)
- MIL-STD-1275D (optional)
- MIL-STD-461E (optional)
- MIL-STD-704F (optional)
- MIL-HDBK-217 (optional)
- UL
- cUL
- CE Class A (LVD)
- CE Class A (EMC)





BLOCK DIAGRAM

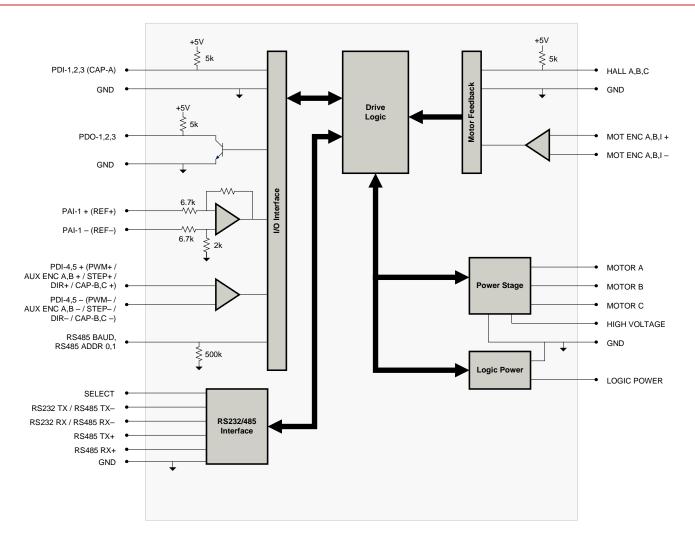

	Information on Approvals and Compliances
MIL-STD-810F	Environmental Engineering Considerations and Laboratory Tests – (as stated)
MIL-STD-1275D	Characteristics of 28 Volt DC Electrical Systems in Military Vehicles – (optional)
MIL-STD-461E	Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment – (optional)
MIL-STD-704F	Aircraft Electric Power Characteristics – (optional)
MIL-HDBK-217	Reliability Prediction of Electronic Equipment (MTBF) – (optional)
c FL [®] us	US and Canadian safety compliance with UL 508c, the industrial standard for power conversion electronics. UL registered under file number E140173. Note that machine components compliant with UL are considered UL registered as opposed to UL listed as would be the case for commercial products.
CE	Compliant with European CE for both the Class A EMC Directive 2004/108/EC on Electromagnetic Compatibility (specifically EN 61000-6-4:2007 and EN 61000-6-2:2005) and LVD requirements of directive 2006/95/EC (specifically EN 60204-1:2006), a low voltage directive to protect users from electrical shock.
ROHS	RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.





SPECIFICATIONS

	Power S	Specifications		
Description	Units	Value		
DC Supply Voltage Range	VDC	10 - 80		
DC Bus Over Voltage Limit	VDC	88		
DC Bus Under Voltage Limit	VDC	8		
Logic Supply Voltage	VDC	5 (+/- 5%)		
Maximum Peak Output Current ¹	A (Arms)	8 (5.7)		
Maximum Continuous Output Current	A (Arms)	4 (4)		
Maximum Continuous Output Power	W	304		
Maximum Power Dissipation at Continuous Current ²	W	16		
Internal Bus Capacitance ³	μF	20		
Minimum Load Inductance (Line-To-Line)4	μH	250		
Switching Frequency	kHz	20		
Maximum Output PWM Duty Cycle	%	92		
	Control	Specifications		
Description	Units	Value		
Communication Interfaces	-	RS-485/232		
Command Sources	-	±10 V Analog, 5V Step and Direction, Encoder Following, Over the Network, PWM and Direction, Sequencing, Indexing, Jogging		
Feedback Supported	-	±10 VDC Position, Auxiliary Incremental Encoder, Halls, Incremental Encoder		
Commutation Methods	-	Sinusoidal, Trapezoidal		
Modes of Operation	-	Current, Hall Velocity, Position, Velocity		
Motors Supported	-	Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless)		
Hardware Protection	-	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage		
Programmable Digital Inputs/Outputs (PDIs/PDOs)	-	5/3		
Programmable Analog Inputs/Outputs (PAIs/PAOs)	-	1/0		
Primary I/O Logic Level	-	5V TTL		
Current Loop Sample Time	μs	50		
Velocity Loop Sample Time	μs	100		
Position Loop Sample Time	μs	100		
Maximum Encoder Frequency	MHz	20 (5 pre-quadrature)		
	Mechanica	al Specifications		
Description	Units	Value		
Agency Approvals	-	RoHS, MIL-STD-810F (as stated), MIL-STD-1275D (optional), MIL-STD-461E (optional), MIL-STD- 704F (optional), MIL-HDBK-217 (optional), UL, cUL, CE Class A (LVD), CE Class A (EMC)		
Size (H x W x D)	mm (in)	63.5 x 50.8 x 22.9 (2.5 x 2 x 0.9)		
Weight	g (oz)	105 (3.7)		
Baseplate Operating Temperature Range ⁵	°C (°F)	-40 - 85 (-40 - 185)		
Ambient Temperature Range	°C (°F)	-40 - 75 (-40 - 167)		
Storage Temperature Range	°C (°F)	-50 - 100 (-58 - 212)		
Thermal Shock	°C (°F)	-40 - 75 (-40 - 167) in 2 minutes		
Vibration	Grms	30 for 5 minutes in 3 axes		
Relative Humidity	-	0 - 95% Non-Condensing		
Cooling System	-	Natural Convection		
Form Factor	-	PCB Mounted		
P1 Connector	-	30-pin, 2.54 mm spaced, dual-row header		
P2 Connector	-	24-pin, 2.54 mm spaced, dual-row header		

Notes

Capable of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with lower current limits. Continuous A_{rms} value attainable when RMS Charge-Based Limiting is used. It is recommended to connect a 100μ F / 100V electrolytic capacitor between High Voltage and Power Ground. 1.

2.

3.

4. 5. Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.

Additional cooling and/or heatsink may be required to achieve rated performance.





PIN FUNCTIONS

		P1 - Signal Connector	
Pin	Name	Description / Notes	1/0
1	RS485 ADDR 0		1
2	RS485 ADDR 1	RS-485 Network Address Selector	
3	PAI-1 + (REF+)	Differential Deservation (40 bit Deservation)	I
4	PAI-1 - (REF-)	Differential Programmable Analog Input or Reference Signal Input (12-bit Resolution)	I
5	GND	Ground	GND
6	RS485 BAUD	RS-485 Baud Rate Selector	
7	PDO-1	Programmable Digital Output	0
8	PDO-2	Programmable Digital Output	0
9	PDO-3	Programmable Digital Output	0
10	PDI-1	Programmable Digital Input	I
11	PDI-2	Programmable Digital Input	I
12	PDI-3 (CAP-A)	Programmable Digital Input or High Speed Capture	I
13	RS232 RX / RS485 RX-	Receive Line (RS-232 or RS-485)	1
14	RS485 RX+	Receive Line (RS-485)	1
15	RS232 TX / RS485 TX-	Transmit Line (RS-232 or RS-485)	0
16	RS485 TX+	Transmit Line (RS-485)	0
17	PDI-4 + (PWM+ / STEP+ / AUX ENC A+ / CAP-B+)	Programmable Digital Input or PWM or Step+ or Auxiliary Encoder or High Speed Capture	I
18	PDI-4 - (PWM- / STEP- / AUX ENC A- / CAP-B-)	(For Single-Ended Signals see DZ HW Installation Manual)	
19	PDI-5 + (DIR+ / AUX ENC B+ / CAP-C+)	Programmable Digital Input or Direction or Auxiliary Encoder or High Speed Capture (For	
20	PDI-5 - (DIR- / AUX ENC B- / CAP-C-)	Single-Ended Signals see DZ HW Installation Manual)	I
21	GND	Ground	GND
22	HALL A		1
23	HALL B	Single-ended Commutation Sensor Input (For Differential Inputs See MC1XDZ01 Datasheet For Recommended Signal Conditioning)	I
24	HALL C	For Recommended Signal Conditioning)	I
25	MOT ENC I+	Differential Encoder Index Input (See MC1XDZ01 Datasheet For Recommended Signal	I
26	MOT ENC I-	Conditioning)	
27	MOT ENC A+	Differential Encoder A Channel Input (See MC1XDZ01 Datasheet For Recommended	I
28	MOT ENC A-	Signal Conditioning)	
29	MOT ENC B+	Differential Encoder B Channel Input (See MC1XDZ01 Datasheet For Recommended	I
30	MOT ENC B-	Signal Conditioning)	

P2 - Power Connector

Р	in	Name	Description / Notes	1/0
1a		LOGIC PWR	Logic Supply Input	I
	1b	RESERVED	Reserved	-
2a	2b	GND	Ground	GND
3a	3b	GND	Ground	GND
4a	4b	HIGH VOLTAGE	DC Power Input. 3A Continuous Current Rating Per Pin. 100µF, 100V external capacitor recommended between High Voltage and Ground.	
5a	5b	HIGH VOLTAGE		
6a	6b	RESERVED	Reserved	
7a	7b	MOTOR C	Motor Phase Outputs. Current output distributed equally across 4 pins per motor phase, 3A continuous current carrying capacity per pin.	
8a	8b	MOTOR C		
9a	9b	MOTOR B		
10a	10b	MOTOR B		
11a	11b	MOTOR A		
12a	12b	MOTOR A		

Pin Details

RS485 ADDR 0 (P1-1)

This pin, RS485 ADDR 0, as well as RS485 ADDR 1, are used for RS-485 network addressing. To set the address of a drive, use the formula

$$RS485Address = \frac{7*Addr0}{3} + 8*\frac{7*Addr1}{3}$$

where *RS485Address* is the desired node address and *Addr0* and *Addr1* represent the voltage that should be applied to the control of the voltage address and *Addr0* and *Addr1* are always integer multiples of 3/1 within the control of the voltages required to set certain node addresses are given in the table below. Note that setting and strong drive address of 0 will utilize the address stored in non-volatile memory.



RS485 ADDR 0 Value (V)	RS485 ADDR 1 Value (V)	RS485 ADDR Tolerance (V)	RS485 Address (Address #)
0	0	±0.1	Address stored in non-volatile memory
3/7 (0.43)	0	±0.1	1
6/7 (0.86)	0	±0.1	2
9/7 (1.3)	0	±0.1	3
		±0.1	
18/7 (2.57)	21/7 (3.0)	±0.1	62
21/7 (3.0)	21/7 (3.0)	±0.1	63

RS485 BAUD (P1-6)

The RS-485 baud rate is set by applying the appropriate voltage to the RS485 BAUD pin as given in the table below.

RS485 BAUD Value (V)	RS485 BAUD Tolerance (V)	RS485 Baud Rate (bits/s)
0	±0.388	Bit rate stored in non-volatile memory
1	±0.388	9.6k
2	±0.388	38.4k
3	±0.388	115.2k

HARDWARE SETTINGS


Jumper Settings

Jumper	Description		Configuration	
	Header Jumper	Not Installed	Pins 1-2	Pins 2-3
J1	Reserved.	-	-	N/A
J2	Reserved.	-	-	N/A
J3	RS-485 selection. Install this jumper (2mm) to select RS-485 communication. This jumper is located on a 6-pin header between the PCB and heatsink. It consists of the two pins closest to the corner of the PCB.	RS-232	RS-485	N/A





MECHANICAL INFORMATION

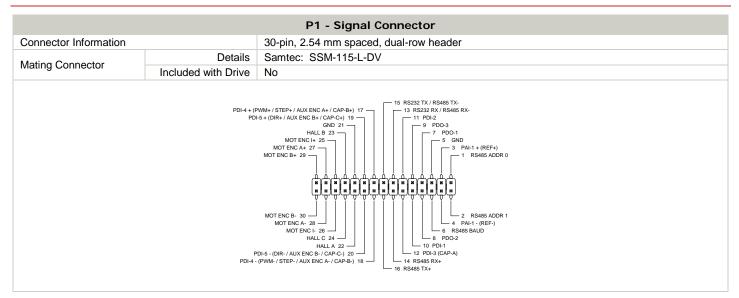


P2 - Power Connector		
Connector Information 24-pin, 2.54 mm spaced, dual-row header		24-pin, 2.54 mm spaced, dual-row header
Mating Organization	Details	Samtec: BCS-112-L-D-PE
Mating Connector	Included with Drive	No
		HIGH VOLTAGE 5a HIGH VOLTAGE 4a GND 2a GND 2a GND 2b GND 2b HIGH VOLTAGE 4b HIGH VOLTAGE 5b HIGH VOL






MOUNTING DIMENSIONS

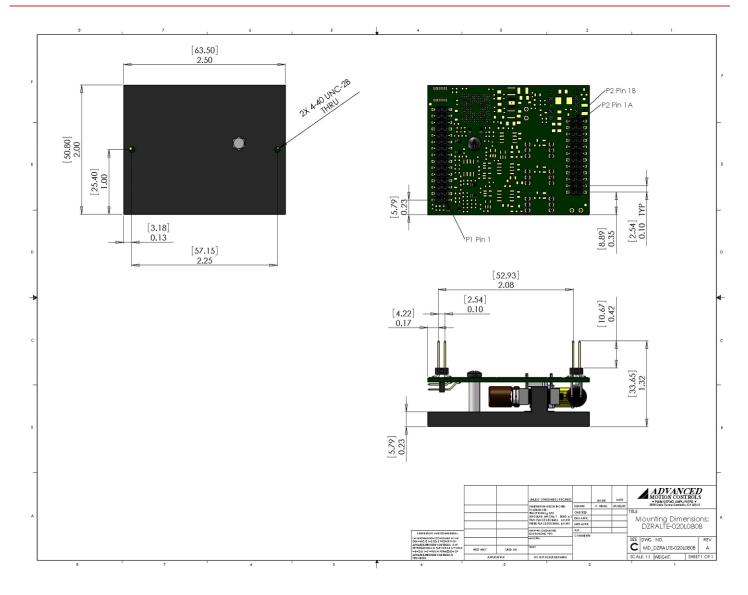





PART NUMBERING INFORMATION

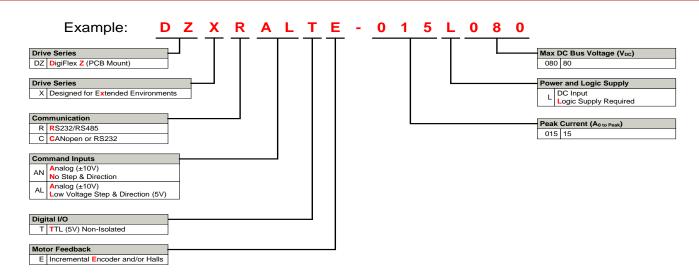

DigiFlex® Performance[™] series of products are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, *ADVANCED* Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability.

Examples of Customized Products			
Optimized Footprint	Tailored Project File		
Private Label Software	Silkscreen Branding		
OEM Specified Connectors	Optimized Base Plate		
No Outer Case	Increased Current Limits		
Increased Current Resolution	Increased Voltage Range		
Increased Temperature Range	Conformal Coating		
Custom Control Interface	Multi-Axis Configurations		
Integrated System I/O	Reduced Profile Size and Weight		

Feel free to contact Applications Engineering for further information and details.

Available Accessories

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit <u>www.a-m-c.com</u> to see which accessories will assist with your application design and implementation.



All specifications in this document are subject to change without written notice. Actual product may differ from pictures provided on sate detection this document.