



UniOP eTOP507

The UniOP eTOP Series 500 HMI products combine state-of-the-art features and top performance with an oustanding design. They are the ideal choice for all demanding HMI applications including factory and building automation.

The eTOP507 features a bright 7" TFT widescreen (16:9) display with a fully dimmable LED backlight. The JMobile software offers full vector graphic capabilities and plenty of connectivity options.



- 7" TFT color display, LED backlight
- 800x480 pixel (WVGA) resolution, 64K colors
- Resistive touchscreen
- 2 Ethernet ports with switch function
- 2 USB Host ports
- SD Card Slot
- Connection to fieldbus systems and I/O using optional plug-in modules
- Slim design. Mounting depth less than 50mm

Highlights

The eTOP Series 500 HMI panels have been designed to run the JMobile software.

- JMobile runtime included. Full compatibility with JMobile Studio.
- Full vector graphic support. Native support of SVG graphic objects. Trasparency and alpha blending.
- Full object dynamics: control visibility and transparency, move, resize, rotate any object on screen. Change properties of basic and complex objects.
- TrueType fonts
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements. Far East languages are supported. Tools available in JMobile Studio support easy third-party translations and help reducing development and maintenance costs of the application
- Data display in numerical, text, bargraph, analog gauges and graphic image formats.
- Rich set of state-of-the-art HMI features: data acquisition, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipes, users and passwords, e-mail and RSS feeds, rotating menus

- Includes support for a wide range of communication drivers for Factory and Building Automation systems.
- Multiple drivers communication capability.
- Remote monitoring and control. Client-Server functionality. Mobile clients supported.
- Remote maintenance and support with VNC-based functionality.
- Off-line simulation of the HMI application with JMobile Studio.
- Powerful scripting language for automating HMI applications. Script debugging improves efficiency in application development.
- Rich gallery of symbols and objects
- Project templates
- Optional plug-in modules for fieldbus systems, I/O and controllers.
- Display backlight dimmable to 0%

ptn0347-9.doc - 18.02.2014





Technical Data


Display		Buzzer	Yes, audible feedback for
Туре	TFT		touchscreen
Resolution	800x480, WVGA		
Active display area	7" diagonal	Ratings	
Colors	64K	Power supply voltage	24 Vdc (10 to 32 Vdc)
Backlight	LED	Current consumption	0.65A at 24Vdc(max.)
Brightness	300 Cd/m ² typ.	Fuse	Automatic
Dimming	Yes	Weight	Approx 1.0 Kg
Diffilling	103	Battery	Rechargeable Lithium battery,
System Resources		Dattery	not user-replaceable
	Microsoft Windows CE CO		not user-replaceable
Operating System	Microsoft Windows CE 6.0	Fundamental	
User memory	128 MB Flash	Environmental	
RAM	256MB DDR	Conditions	
		Operating temperature	0 to 50 °C (vertical installation)
Operator Interface		Storage temperature	-20 to +70 °C
Touchscreen	Analog resistive	Operating and storage	5 – 85 % relative humidity,
LED indicators	1 (dual color)	humidity	non-condensing
		Protection class	IP66 (front)
			IP20 (rear)
Interface			,
Ethernet	2 10/100 Mbit with integrated	Dimensions	
	Switch	Faceplate LxH	187x147 mm (7.36x5.79")
USB	2 Host Interface (1 version 2.0,	Cutout AxB	176x136 mm (6.93x5.35")
302	1 version 2.0 and 1.1)	Depth D+T	47+4 mm (1.85+0.16")
Serial	RS-232, RS-485, RS-422,	Deptil D+1	47 +4 11111 (1.85+0.10)
Serial	software configurable	Ammericale	
Expansion Slot	2 Optional plug-in	Approvals	e atana
Expansion Slot		CE	Emission
Memory Card	SD Card Slot		EN 61000-6-4
			Immunity
Functionality	V : 1 1 0V0 1		EN 61000-6-2
Vector graphics	Yes, includes SVG support		for installation in industrial
Object dynamics	Yes. Visibility, opacity, position,		environments
	size, rotation for most object		
	types.	DNV	DNV Type Approval Certificate
TrueType fonts	Yes		
Multiple driver	Yes	UL	UL508 Listed
communication			Haz. Loc. Class I, Division 2,
Data acquisition and	Yes. Flash memory storage		Groups A,B,C and D.
trend presentation	limited only by available		
·	memory	C-Tick	C-Tick mark
Multilanguage	Yes, with runtime language	5 1.6.K	
	switching.	GL	Germanischer Lloyd Type
Recipes	Yes. Flash memory storage	92	Approval Certificate
recoped	limited only by available		Approval Certificate
	memory		
Alarms	Yes		
	Yes		
Historical event list			
Users and passwords	Yes		
Hardware Real Time	Yes, with battery back-up		
OL: I			
Clock Screen saver	Yes		

ptn0347-9.doc - 18.02.2014 2






Dimensions

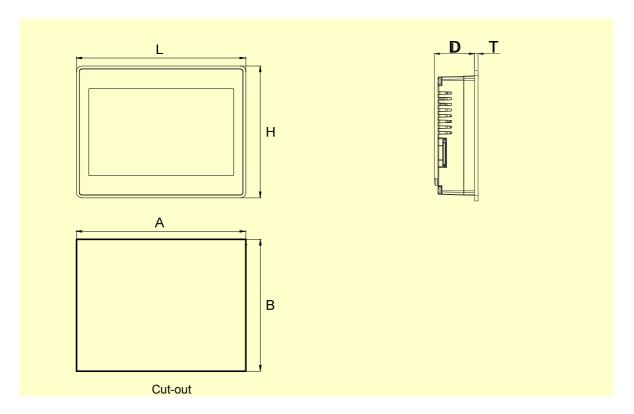

Connections

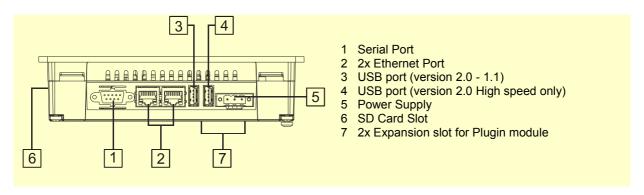





		4.5
Ordoring	Intor	mation
Ordering		

Model eTOP507-White	Part Number +ETOP507U1P1 +ETOP507U1P3	Description 7" widescreen TFT color touchscreen with Ethernet and USB interfaces. White front panel. JMobile run-time.
eTOP507-Silver	+ETOP507U2P1 +ETOP507U2P3	7" widescreen TFT color touchscreen with Ethernet and USB interfaces. Silver front panel. JMobile run-time.
eTOP507-Black	+ETOP507U3P1 +ETOP507U3P3	7" widescreen TFT color touchscreen with Ethernet and USB interfaces. Black front panel. JMobile run-time.
PROTFOIL-07-GL	R-PROT12	Disposable protection foil for 5.7" and 7" eTOP touch panels (10 pieces).
PROTFOIL-07-UV	R-PROT18	Disposable protection foil for 5.7" and 7" eTOP touch panels (10 pieces). UV resistant.

ptn0347

Copyright © 2011-2014 Exor International S.p.A. - Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.uniop.com