SPH Series Helical Performance Redefined




GAM Can. Just Ask.




Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com **SPH** Series

The SPH series features helical gearing which brings a whole new level of power and precision to GAM's already extensive portfolio of gear reducer technology. With special attention paid to every aspect during development, the SPH gracefully combines design and engineering, to deliver our best inline planetary gear reducer yet. For dynamic and demanding servo applications where performance is critical, the SPH is highly powerful and efficient, yet smooth and quiet.

- I. Helical Gears Precision cut and ground to quietly deliver higher torques and accuracies
- 2. Adapter Flange Custom machined to match any motor for easy installation
- 3. Input Clamping Element Low inertia and balanced for high speeds with a single tangential screw ensures a secure motor connection
- 4. Bearings Optimized taper roller bearings to accommodate high radial and axial loads
- 5. Housing Sleek and contoured steel housing with black oxide treatment for maximum durability
- 6. Ring Gear Machined directly into the single piece housing for maximum stiffness
- 7. Output Shaft Offered smooth or keyed and can be easily shortened if required

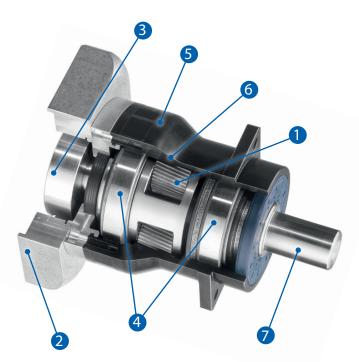

Available configurations for simple and compact machine integration

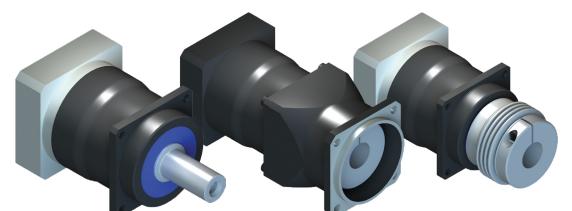

SPH-W

Shaft output design for mounting to pulleys and rack and pinion systems. Available with a smooth CELECTROMATE eved output shaft.

SPH-K

Features a bellows or a zero backlash elastomer-spider coupling on the output for maximum stiffness and the best results in highly dynamic applications. An output housing comes standard with custom housings available.

SPH-F

Same benefits as the SPH-K models without the housing on the output. Plug the gearbox directly into your machine and achieve a more compact design.

Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com

Sold & Serviced By:

	LOW	нідн	SUPERIOR	WHY GAM SPH?				
Flexibility	Competition A		SPH	Configured to meet the application,				
ПСХІБІНСУ	Competition B		Эгп	not the other way around!				
Modifications &	Competition A		SPH	Flexible manufacturing and				
Customizations	Competition B		эрп	experienced engineering				
Performance			SPH					
			Competition A	95 years of gear manufacturing experience				
			Competition B	capenence				
Quality			SPH	State of the art testing and				
			Competition A	measuring machines.				
			Competition B	ISO 9001 certified				

When your application is demanding...demand GAM's SPH

The SPH is GAM's highest performing inline gear reducer

Designed for **dynamic** & **cyclic** applications Can be optimized for **high speed** and **continuous** applications

Helical gears make the difference

The helical gear profile is cut at an angle that allows for gradual tooth engagement allowing for smooth, accurate, and quiet transmission. GAM's SPH gears are cut at the optimal helix angle to minimize resultant axial forces and they have a larger tooth width to maximize torque carrying capacity compared to the competition.


It all starts with the gears

The SPH's helical gears are produced to an extremely high level of quality and ground for further precision. With state of the art testing and measuring instruments and qualified personnel, we assure that the SPH will meet and exceed your requirements. With the SPH, every detail counts.






- CNC coordinate measurement method
- CNC gear measurement method
- Mechanical measurement test
- Surface testing
- Thickness measurement
- Magnetic particle inspection
- Hardness testing
- Grinding burn inspection





Technical Specifications

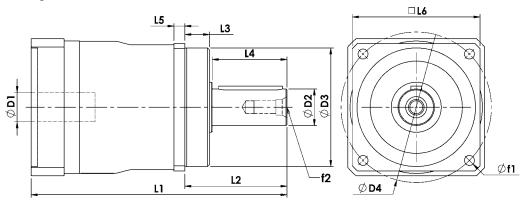

SPH-W		50		60		75		100		140		180	
		mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)
D1 _{max} Standard		11	(0.433)	14	(0.551)	19	(0.748)	24	(0.945)	32	(1.260)	38	(1.496)
D1 _{max} Available ¹)	Motor Shaft Diameter	11	(0.433)	19	(0.748)	24	(0.945)	32	(1.260)	38	(1.496)	48	(1.890)
D1 _{max} 2-stage		11	(0.433)	14	(0.551)	19	(0.748)	24	(0.945)	32	(1.260)	38	(1.496)
D2 k6	Output Shaft Diameter	14	(0.551)	16	(0.630)	22	(0.866)	32	(1.260)	40	(1.575)	55	(2.165)
D3 g6	Pilot Diameter	45	(1.772)	60	(2.362)	70	(2.756)	90	(3.543)	130	(5.118)	160	(6.299)
D4	Output Bolt Circle	63	(2.480)	68	(2.677)	85	(3.346)	120	(4.724)	165	(6.496)	215	(8.465)
f1	Mounting Holes	5.5	(0.217)	6	(0.236)	6.6	(0.260)	9	(0.354)	11	(0.433)	13	(0.512)
f2	Shaft End Thread	aft End Thread M5		M5		M8		M8		M16		M20	
L1²)		125	(4.921)	150	(5.906)	165	(6.496)	220	(8.661)	280	(11.024)	330	(12.992)
L1 2-stage ²)	Overall Gearbox Length	165	(6.496)	190	(7.480)	210	(8.268)	270	(10.630)	345	(13.583)	420	(16.535)
L2	Shaft Length	38	(1.496)	48	(1.890)	56	(2.205)	88	(3.465)	112	(4.409)	112	(4.409)
L3	Pilot Height	12	(0.472)	18	(0.709)	18	(0.709)	28	(1.102)	27	(1.063)	27	(1.063)
L4	Usable Shaft Length	24	(0.945)	28	(1.102)	36	(1.417)	58	(2.283)	82	(3.228)	85	(3.346)
L5	Flange Thickness	6	(0.236)	6	(0.236)	7	(0.276)	10	(0.394)	12	(0.472)	18	(0.709)
L6	Output Square	55	(2.165)	61	(2.402)	75	(2.953)	100	(3.937)	140	(5.512)	180	(7.087)

1) For larger motor shaft diameters, please contact GAM. 2) Depending on the motor, value can vary.

SPH-W				50 60 75				75	100		140		180			
Stock Ratios ²⁾			5, 10													
All Ratios Available		-						1 Stage: 3	, 4, 5, 7, 10)						
						2 Stag	e: 12, 15,	16, 20, 25	, 28, 30, 35	5, 40, 50, 7	0, 100					
	Nm (lb-in)	3:1-5:1	20	(177)	60	(531)	100	(885)	250	(2213)	450	(3983)	900	(7966)		
		7:1	18	(159)	40	(354)	80	(708)	180	(1593)	420	(3717)	800	(7081)		
		10:1	15	(133)	30	(266)	65	(575)	110	(974)	240	(2124)	450	(3983)		
Nominal Output Torque (I ₂₁)		12:1- 40:1	13	(115)	60	(531)	100	(885)	250	(2213)	450	(3983)	900	(7966)		
		50:1	13	(115)	40	(354)	80	(708)	250	(2213)	450	(3983)	900	(7966)		
		70:1	10	(89)	40	(354)	80	(708)	180	(1593)	420	(3717)	800	(7081)		
		100:1	7	(62)	30	(266)	65	(575)	110	(974)	240	(2124)	450	(3983)		
Max Acceleration Output Torque $(T_{_{2B}})$	Nm (lb-in)	1.5 x Nominal (T _{2n})														
Emergency Output Torque (T _{2not})	Nm (lb-in)						3.5 x	Nominal	(T _{2n})							
Nominal Input Speed (n _{1n})		-	4500		4500		45	4500		4000		3800		2000		
Max Input Speed (n _{1max})	RPM	- 6000														
	arcmin	1-stage	<4		<4		<4		<4		<4		<4			
Standard Output Backlash (j)		2-stage	<6		<6		<6		<6		<6		<6			
Reduced Output Backlash (j)	arcmin	1-stage	<3		<2		<2		<2		<2		<2			
		2-stage	<	<5	<	<4	<	:4	<	4	<	4	<	4		
Allowable Radial Load (F _{rad}) ¹⁾	N (lbf)	-	700	(157)	3,500	(787)	4,500	(1012)	8,000	(1798)	12,000	(2698)	20,000	(4496)		
Allowable Axial Load (F _{axial})	N (lbf)	-	600	(135)	1,600	(360)	2,400	(540)	2,400	(540)	6,000	(1349)	10,000	(2248)		
Torsional Stiffness (C ₁₂₁)	Nm/arcmin (Ib-in/arcmin)	1-stage	2.0	(18)	4.0	(35)	12	(106)	32	(283)	54	(478)	168	(1487)		
		2-stage	2.0	(18)	4.0	(35)	12	(106)	32	(283)	54	(478)	168	(1487)		
Noise Level (L _{PA})	dB(A)	1-stage	<60		<60		<63		<64		<65		<65			
		2-stage	<	<60 <61 <62					<(53	<(54				
Efficiency at Load	1-stage: 98% 2-stage: 96%															
Serviced By: Service Life		>20,000 hours														

1) Load applied at center of output shaft @ 100 RPM. 2) Excludes size 180

Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com

ELECTROMATE

Sold &

03