
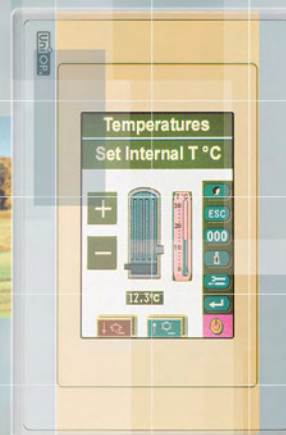


UniOP

Touch & Controls

Open New Horizons with UniOP

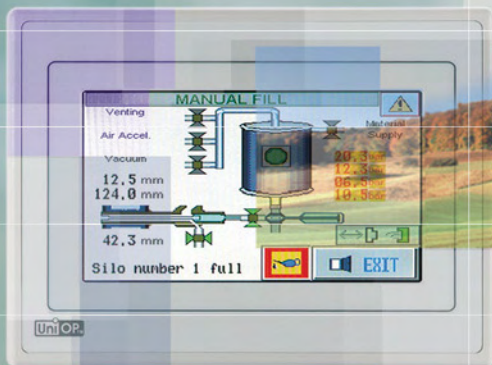

Sold & Serviced By:

SERVO2GO.com

Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0249

sales@servo2go.com


www.servo2go.com

No limits

UniOP touch & controls

EXOR has a long-standing history of delivering the highest-quality products for industrial automation and embedded system applications. Prestigious automation companies confirm this reputation by relying on EXOR's tried & true know-how and offering UniOP products under various brand-label agreements. EXOR provides total HMI solutions, from board-level embedded systems to simple text displays, monochrome graphics units, full color touchscreen workstations, to powerful industrial computers. Exor products are

currently sold, serviced, and supported in more than 40 countries around the world, with many large companies and OEM using EXOR units to expand their product offering. EXOR's goal is to provide easy to use products that meet today's challenging requirements with a strong focus on leveraging the advantages of ever-changing technologies. Using continuing customer oriented product development, EXOR has taken specific applications in PLC, Motion and Industrial PC, and turned them into proven solutions.

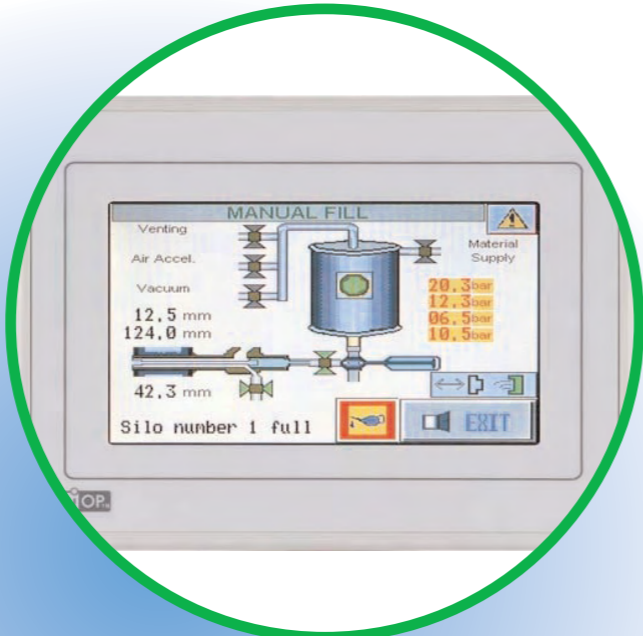

eTOP04C

Compact - Capable - Cost Effective

The EXOR Product Range

This is unique...
Even the smallest systems have the capability of sending SMS messages or receiving data via the GSM modem and transferring it as a gateway to the control system. There is the option of integrating a high-performance PLC module even in the lowest cost systems. The CoDeSys control development tool from 3S can be used to create your IEC 61131 applications. This provides an inexpensive and compact alternative to conventional PLC systems.

Video Input Module
Display up to four live video images with the VMO10 video input module. UniOP panels can easily become the front-end for video cameras and computers and are ideal for displaying live images on the factory floor or in building automation/marine applications.
USB Interface
The new USB interface, available on C-series products, is compatible with Flash drives and offers the simplest way to upgrade applications and copy recipe data.



eTOP02 / eTOP03



eTOP05



eTOP06 / eTOP06C



eTOP20C




eTOP33C



eTOP40C



eTOP50C

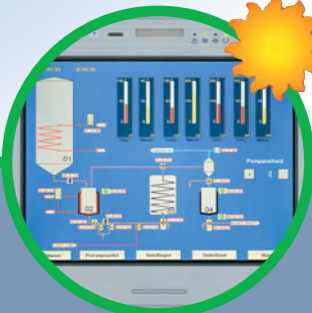

High Brightness Solutions

Integrated PLC

Customer-specific development



ePAD03/ePAD04



ePAD05/ePAD06



CP10G-04/CP11G-04



ePALM10



ePAD33C

Low cost high-performance touch-displays

One software for all systems



Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0249

sales@servo2go.com

www.servo2go.com

Worldwide sales & service

Many Devices - One Software Tool

EXOR Designer 6

The software concept


Designer 6 provides users with an easy to use yet powerful software interface for building applications for the entire UniOP product family. Some of the features include the integration of TrueType fonts, support for Asian characters and Ethernet upload/download. In addition, access to recipe data, alarms, event list and trend buffers has been extended. With enhanced language management, 64K colors on TFT displays, auto execution of macro commands on power-up and optional video input module, Designer meets the need of the most demanding HMI applications

in industrial and building automation. Detailed project documentation is provided by the extended printout functions, with cross-referencing. With a single programming tool for all UniOP panels, including text displays, graphic screens, handheld or touch panels, and the availability of more than 200 drivers, Designer gives you the tools necessary for all your HMI needs. The easy to use and intuitive interface will help you create screens that provide your operators with the information that they need, in real time, to manage the process.

Ethernet communication protocols


Most Ethernet-based communication protocols currently in use in the industry are available for use with one of the optional modules. Among them:

- Simatic S7
- Modbus/TCP (Client&Server)
- Ethernet/IP CIP
- SAIA S-BUS
- GE SRTIP
- Hitachi H
- Festo EasyIP
- Mitsubishi Q
- Omron FINS
- Bosch Rexroth SIS
- Jetter PCOM7
- CoDeSys L2/L4
- Mitsubishi FX
- Beckhoff

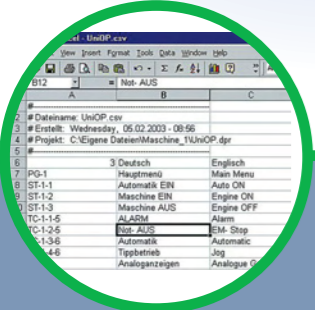

Designer 6 Highlights

Designer offers options in the display of numeric data with leading zero and masked data entry mode (password-like). Dynamic visibility control, to show or hide all objects in the project based on a PLC value, along with recipe configuration, with virtually no limit to the number of recipe sets and items, are also standard. Internal memory buffer is available and can be used for recipe name for controllers without ASCII support. Alarms presentation include priority-based or time-based strategies.

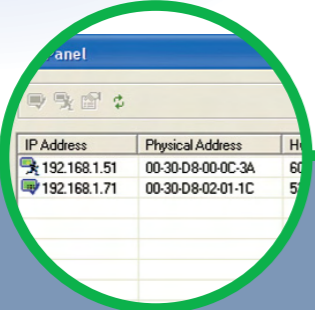


C-Series eTOP

The eTOP C-Series of touch panels include a built in 10/100 baseT Ethernet interface and USB port. The standard file system allows the use of a portable USB flash drive to copy and load project and upgrade firmware. A streamlined automatic firmware upgrade procedure is available if files are present in the user memory. With the built in Ethernet port and the use of optional fieldbus module (Profibus, DeviceNET, CANopen...), the C series eTOP can act as a bridge between your industrial networks.



Multi Language support

Far East languages such as Chinese and Japanese are supported by Designer for Multilanguage applications. Both Western and Far East scripts can coexist in a project using the text export/import facility supporting Unicode. Simply export all the text information to a .csv file, have it translated by professionals and import the translated information to your Designer application for a complete integration.

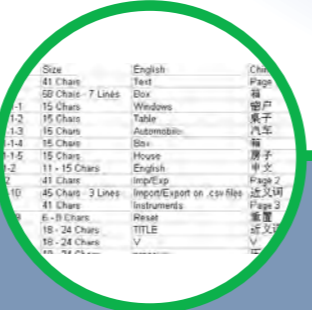

Language management - import/export of applications

All alarm messages, legends and dynamic text information can be conveniently exported for ease of translation to an Excel spreadsheet. This makes it possible to re-import your text in different languages into your project file. The creation of Chinese text is also done with ease: with a few commands your legend and dynamic text can contain Chinese characters.



Full Ethernet Connectivity

Connect your panel to a network and you are ready for upload/download of project files, access to recipe data, alarms and trend buffers. Several options are available for the panel's IP assignment including DHCP. You can build your automation system completely based on Ethernet communication. Just plug one cable to program the HMI with Designer, network multiple panels, connect the HMI to the PLC and perform data exchange with higher-level systems with the UniNet OPC Server.




Enhanced graphics

All C-generation products with a TFT display support a color depth of 16 bits for images up to 64K colors. The integrated graphic editor makes it possible for users who have no special software knowledge to process either imported graphics or their own custom graphics. Therefore, the pixel-oriented creation and positioning of graphics is made easy. Designer 6 supports the import of all popular standard graphic formats such as JPG, BMP, TIF, DXF.



Object-oriented workflow

Grouped objects can be copied into an object dictionary as a group using drag and drop. They can then be given a name and simply used again in other projects. This makes it easy for you to create and administer your own symbol or function groups.

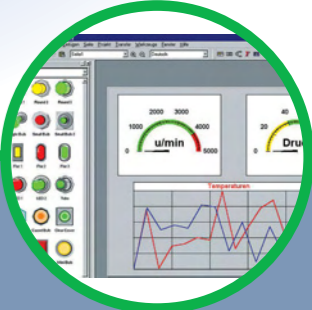

All elements in the designer software are objects and this makes it easy for them to be processed, copied, cut and pasted, in the same way you would with other Windows-based programs. In this way objects can also be easily combined with each other. The software makes it possible for objects to be grouped or given a specific sequence.

Sold & Serviced By:
SERVO2GO.com
Toll Free Phone: 877-378-0240
Toll Free Fax: 877-378-0249
sales@servo2go.com
www.servo2go.com

Everything at a Glance
EXOR Operator Panels



Display:	Type	ePALM10	ePAD03 / ePAD04	ePAD05 / ePAD06	CP10G-04 / CP11G-04	BKDR-46 / BKDC-46	ePAD33C	eTOP02 / eTOP02C	eTOP03	eTOP04C	eTOP05	eTOP06	eTOP06C	eTOP19CP	eTOP20C	eTOP33C	eTOP40C	eTOP49CP	eTOP50C	eTOP59CP
		LCD	LCD	LCD	LCD	LCD/STN Color	TFT Color	TFT Color	LCD monochrome	TFT Color	LCD monochrome	TFT Color	TFT Color	High Brightness TFT Color	TFT Color	TFT Color	TFT Color	High Brightness TFT Color	TFT Color	High Brightness TFT Color
Operator Interface:	Colors	-	-	-	-	- / 16	64K	256	-	256	-	256	64K	64K	64K	64K	64K	64K	64K	64K
	Diagonal (inch)	-	-	-	-	5.7"	10.4"	3.5"	3.8"	4.3"	5.7"	5.7"	5.7"	5.7"	7.5"	10.4"	12.1"	12.1"	15"	15"
	Lines x characters	8 x 20	4 x 20	4 x 20	4 x 20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Resolution	120 x 64	120 x 32	120 x 32	120 x 32	320 x 240	640 x 480	320 x 240	320 x 240	480 x 272	320 x 240	320 x 240	320 x 240	320 x 240	640 x 480	640 x 480	800 x 600	800 x 600	1024 x 768	1024 x 768
	Dimming	-	-	-	-	-	yes	-	-	yes	-	-	yes	yes	yes	yes	yes	yes	yes	yes
Memory:	Touchscreen	-	-	-	-	-	-	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Function Keys	9	4	9	12	33	35	-	-	-	-	-	-	-	-	-	-	-	-	-
	System keys	18	6	10	23	24	24	-	-	-	-	-	-	-	-	-	-	-	-	-
	Numerical keys	yes	-	yes	yes	yes	yes	-	-	-	-	-	-	-	-	-	-	-	-	-
	LED indicators	20	5	10	13	25	25	-	-	-	-	-	-	-	-	-	-	-	-	-
Interface:	User Memory (Flash)	512KB	512 KB	512KB	512KB	32 MB	64 MB	1 MB / 2 MB	512KB	2 MB	32 MB	32 MB	64 MB	64 MB	64 MB	64 MB	64 MB	64 MB	64 MB	64 MB
	Flash card option	-	-	-	-	yes	yes	-	-	-	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Recipe memory	16KB	16KB / -	16KB / -	16KB / -	32KB	Flash	32KB	32KB	32 KB	32KB	32KB	Flash	Flash	Flash	Flash	Flash	Flash	Flash	Flash
	PLC Port	RS-232, RS-485			RS-232, RS-485, CL			RS-232, RS-485			RS-232, RS-485, CL									
	Programming/Printer Port	yes	-	-	yes / -	yes	yes	-	-	-	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
Communication:	UniNet (server and client)	yes	yes / client	yes / client	yes / client	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Aux port (optional fieldbus/Ethernet)	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Ethernet Port (built-in)	-	-	-	-	-	yes	- / yes	-	yes	-	-	yes	yes	yes	yes	yes	yes	yes	yes
	USB Port	-	-	-	-	-	yes	-	-	yes	-	-	yes	yes	yes	yes	yes	yes	yes	yes
	Video Input Option	-	-	-	-	-	yes	-	-	-	-	-	yes	yes	yes	yes	yes	yes	yes	yes
Functions:	200 drivers, 11 fieldbuses	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Dual driver	yes	yes / -	yes / -	yes / -	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Graphic	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Vector graphics	-	-	-	-	-	yes	-	-	yes	-	-	yes	yes	yes	yes	yes	yes	yes	yes
	TrueType Font Support	-	-	-	-	-	yes	-	-	-	-	-	yes	yes	yes	yes	yes	yes	yes	yes
Power Supply:	Trend acquisition and display	-	-	-	-	yes	yes	-	-	-	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Battery	yes	yes / -	yes / -	yes / -	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Real Time Clock	yes	yes / -	yes / -	yes / -	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Password	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes
	Alarms	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024
Environment:	Event list	256	256 / -	256 / -	256 / -	1024	1024	256	256	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024	1024
	Voltage	18 - 30 VDC																		
	Current rating (at 24 VDC)	0.3 A	0.25 A	0.25 A	0.3 A	0.6 A	1.2 A	0.4 A	0.4 A	0.4 A	0.6 A	0.5 A	1.0 A	1.0 A	1.1 A	1.2 A	1.3 A	1.8 A	1.5 A	1.7 A
	Degree of protection (front panel)	IP65	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X	IP65, NEMA 4X
	Temperature range (vertical installation)	0 – 50 °C	0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C	0 – 45°C	0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C	-10 – +55°C	0 – 45°C	0 – 45°C	0 – 45°C	0 – 45°C	0 – 45°C	0 – 45°C
Dimensions:	Front L x H mm / inches	116x239 / 4.56x9.40	149x109 / 5.86x4.29	149x109 / 5.86x4.29	141x176 / 5.55x6.93	275x220 / 10.82x8.66	311x276 / 12.24x10.86	149x109 / 5.86x4.29	149x109 / 5.86x4.29	187x147 / 7.36x5.78	187x147 / 7.36x5.78	187x147 / 7.36x5.78	187x147 / 7.36x5.78	187x147 / 7.36x5.78	232x187 / 9.13x7.36	287x232 / 11.30x9.13	337x267 / 13.26x10.51	337x267 / 13.26x10.51	392x307 / 15.43x12.08	392x307 / 15.43x12.08
	Cutout L x H mm / inches	Handheld	136x96 / 5.35x3.78	136x96 / 5.35x3.78	128x163 / 5.04x6.41	262x207 / 10.31x8.15	292x257 / 11.49x10.12	136x96 / 5.35x3.78	136x96 / 5.35x3.78	136x96 / 5.35x3.78	176x136 / 6.93x5.35	176x136 / 6.93x5.35	176x136 / 6.93x5.35	176x136 / 6.93x5.35	221x176 / 8.70x6.93	276x221 / 10.86x8.70	326x256 / 12.83x10.08	326x256 / 12.83x10.08	381x296 / 15.00x11.65	381x296 / 15.00x11.65
	Weight	0.5 Kg (without cable)	1 Kg	1 Kg	1.1 Kg	1.9 Kg	2.7 Kg	1 Kg	1 Kg	1 Kg	1.4 Kg	1.4 Kg	1.4 Kg	1.4 Kg	1.6 Kg	2.3 Kg	2.9 Kg	2.9 Kg	3.9 Kg	3.9 Kg
	Approvals:	CE, cULus	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2	CE, cULus	CE, cULus	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2*	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2*	CE, cULus, Class I Div 2*	CE, cULus, Class I Div 2, RINA, GL	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2	CE, RINA, GL	CE, cULus, Class I Div 2	CE, cULus, Class I Div 2, RINA, GL
	Programming:	Designer 6																		

Equipment	Memory		Communication modules										Video Input		HMIcontrol									
																								
Type Description	MEM-05 512 KB	MEM-10B 32 MB	TCM01 MPI	TCM02 Suconet	TCM03 DeviceNet	TCM04 Interbus	TCM07 MPI (no isolation)	TCM08 Profibus DP	TCM09 CANopen	TCM10 Ethernet UDP/IP	SCM11/SCM11-C Ethernet TCP/IP	TCM15** RS-232 interface	TCM16** RS-485 interface	TCM11 KNX	Video Input Module	SCM05-3 PLC module with CoDeSys, CANopen	SCM11-C PLC module with CoDeSys, Ethernet	SCM12-C PLC module with CoDeSys, Ethernet, CANopen	UIM03 I/O module, 16 DI, 16 DO	UIM05 I/O module, 20 DI, 12 DO, 8 AI, 8 AO	UIM06 I/O module, 20 DI, 20 DO, 8 AI, 2 AO	UnilOAD-USB Flash Card Programmer	PROTXX protection film	printable slide-in key legend sheets

* pending
** only for ePAD03, ePAD05, eTOP02, eTOP03

Sold & Serviced By:

SERVO2GO.com

Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0240

sales@servo2go.com

www.servo2go.com

EXOR Control Solutions: Modular and Flexible

EXOR Embedded Technology

Flexible communication and customer-specific embedded technology have contributed to EXOR's high integration capability.



For many years now, all EXOR data entry systems have had a high level of integration capability because of the extensive offering of communication interfaces. EXOR's compatibility with the worldwide web, mobile phones, PLCs and the related

communication standards offer a highly flexible solution. Interchangeable communication modules provide a set of industry standard solutions, while keeping the communication open for possible changes in the future. EXOR systems provide expansion ports for optional modules with the connections to highly intelligent system boards that can provide customer specific solutions. This is true whether

it's a web server, embedded PLC, motion control or simply an Ethernet module for connection to the planned or existing company network. With our multi-protocol UniNet OPC server, data can be simply integrated into the control and IT system via Ethernet.

Communication modules

Communication modules for all fieldbus and LAN applications can be integrated in all EXOR systems including handheld systems handheld systems.

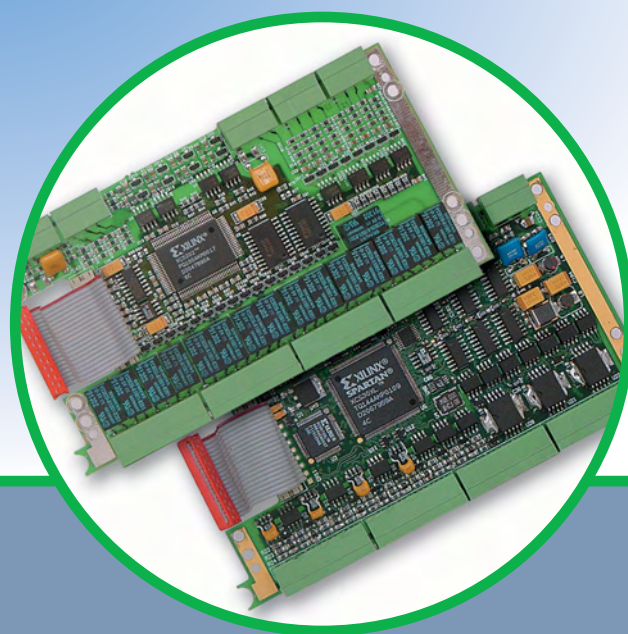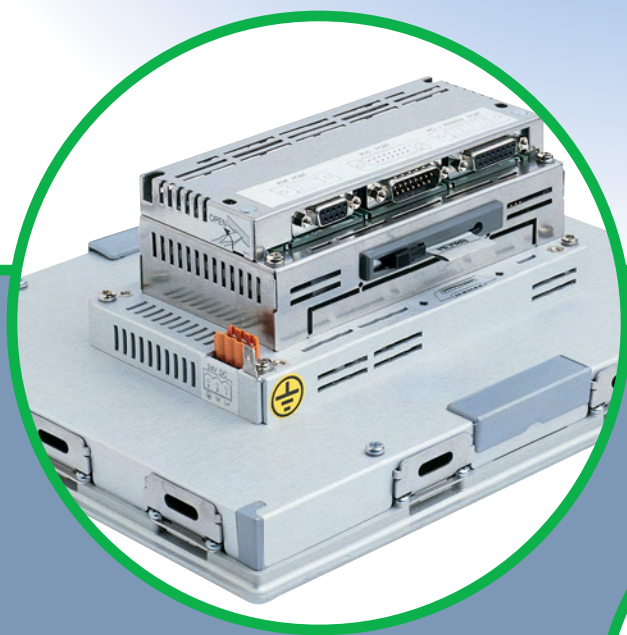

CANopen




Ethernet TCP/IP


Profibus DP

CANopen

Simatic S7 MPI
DeviceNet
Suconet K
EIB

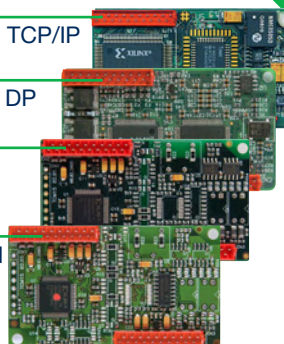

PLC module
running CoDeSys

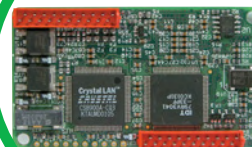

Sold & Serviced By:

SERVO2GO.com

Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0249

sales@servo2go.com

www.servo2go.com

Sold & Serviced By:



Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0249

sales@servo2go.com

www.servo2go.com