

The MAC motor - 50 to 134 W - the complete motion solution for smaller powers ratings

Brushless servo motor with integrated controller everything in one unit, except power supply.

Pulse input and outputs
±10V analogue input
In position and Error output

High efficiency Power
Mos-fets in motor driver

Main Control board

Standard NEMA23 flange
and shaft

RS232 and RS485
interface for setup and
monitoring

Wide supply range
12 to 48 VDC

Expansion module (shown MAC00-B1) for
adapting to a wide range of
applications

Solid aluminium housing which
protects and shields the internal
components

Optical encoder (4096 CPR)
for precise positioning and
speed regulation

3 phase brushless
servo motor

Hall sensors for initializing and
maintaining motor in a stationary
position after powering up

Ball bearings for
maintenance free
operation



Cables

Cables for all types of set up can be delivered as required. In this way installation is fast and easy for our customers



Electronic brake

Optionally an electronic brake, type MAB23x, can be mounted on all motors with a NEMA23 flange and 6.35mm shaft. It is useful for holding the motor shaft fixed at power off or when the motor is used in a vertical application



IP67 Protection

IP67 versions can also be delivered. They are resistant against rough chemicals and ideal for use in food processing, pharmaceutical and chemical industries. A double shaft seal and leak-proof cable entry provide watertight sealing



Power Supplies

JVL can supply a wide range of power supplies for supplying one or several MAC motors. They range from very simple do-it-yourself kits to big switch mode supplies. It should be noted that MAC800 includes a complete 115/230 VAC power supply for driver voltage. Only 24VDC for control circuit is required externally

Adapt your motor to your application

The JVL Integrated motors utilizes the unique module concept. Plug-in expansion modules adapt the motor to the application. You can choose connector type, D-Sub, cable glands or M12 connectors and you can choose freely between Profibus, DeviceNet, CANopen or nano PLC control. A High

Basic Modules



Analog
Pulse I/O
2DO
Cable

MAC00-CS
Low cost module, with
cable glands. Pulse/dir.
±10V and 5V serial

Pulse/Dir
Analog



Analog
RS232
RS485
Pulse I/O
2DO
DSUB

MAC00-B1,
General purpose module
with Sub-D connectors:
Pulse/Dir, ±10V,

RS 232
485



Analog
RS232
RS485
Dual Supply
2DO
Cable

MAC00-B2
General purpose module
w/Cable Glands: other-
wise same as -B1

RS 232
485



Analog
RS232
RS485
Pulse I/O
Dual Supply
2DO
M12

MAC00-B4
General purpose module
w/M12 connectors.
Double supply

RS 232
485



Analog
RS232
RS485
Pulse I/O
USB
Dual Supply
6HI I/O
M12

MAC00-B41
Is a MAC00-B4 module
with extended I/O
functions and USB

RS 232
485

Programable Modules



Analog
RS232
RS485
Pulse I/O
8DI+4DO
DSUB

MAC00-R1
Nano-PLC Module w/Sub-
D connectors: Stand-alone
operation with 8 DI + 4 DO

PLC
NANO



Analog
RS232
RS485
Pulse I/O
8DI+4DO
M12

MAC00-R4
Nano-PLC Module w/M12
connectors: otherwise same
as -R1

PLC
NANO

Process Control Modules



RS232
RS485
Dual Supply
2 AI
2 AO
2 DO
Pulse

MAC00-P4 or P5
Process Control module
with analogue 4-20mA
input

PROCESS
Control

sales@servo2go.com
www.servo2go.com

DSUB 15 pin D-sub connectors P42
Cable Shielded cable up to 20 m IP67
M12 5 pin M12 connector Cable up to 20 m IP67
Dual Supply Position and parameters can be maintained under emergency stop


The complete range of MAC motors®

The complete range of JVL AC servo, integrated MAC motors offer you a wide selection of motor sizes adaptable to a wide range of applications







Speed and wireless modules add to the possibilities. This means that you have possibilities as with no other motors on the market, and also important, you only pay for what you need. Moreover, if you do not find the feature you need please contact us and we will develop a customized module for you.


Wireless Modules

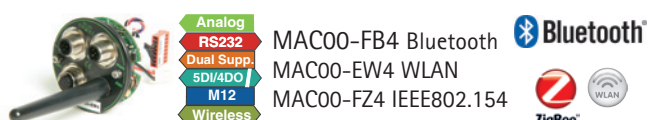

Field Bus Modules

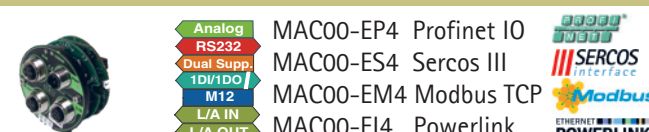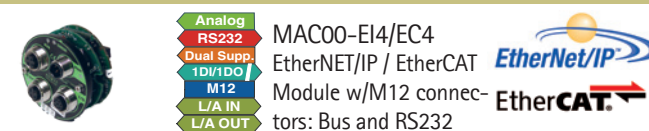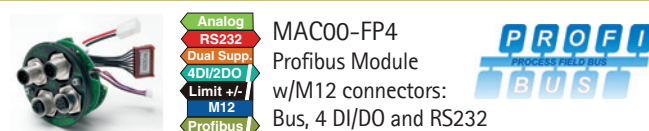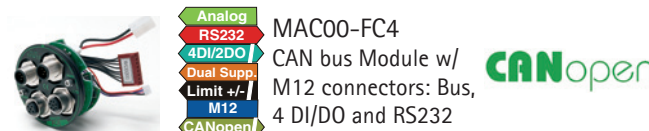



High Speed Multi-Axis modules

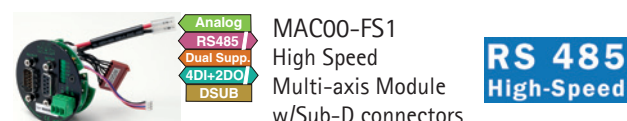

- Analog: $\pm 10V$ for speed or torque control or 24V home switch
- Pulse I/O: RS422 balanced inputs for pulse/direction incremental signal or encoder output
- Limit +/-: 2 of the inputs can be used as negative or positive limit switch inputs. = Optocouplers.

The MAC motor - 400 W and 750 W - the complete solution for medium and larger power ratings

Brushless servo motor with integrated controller everything in one unit including mains power supply

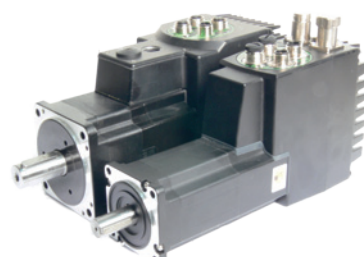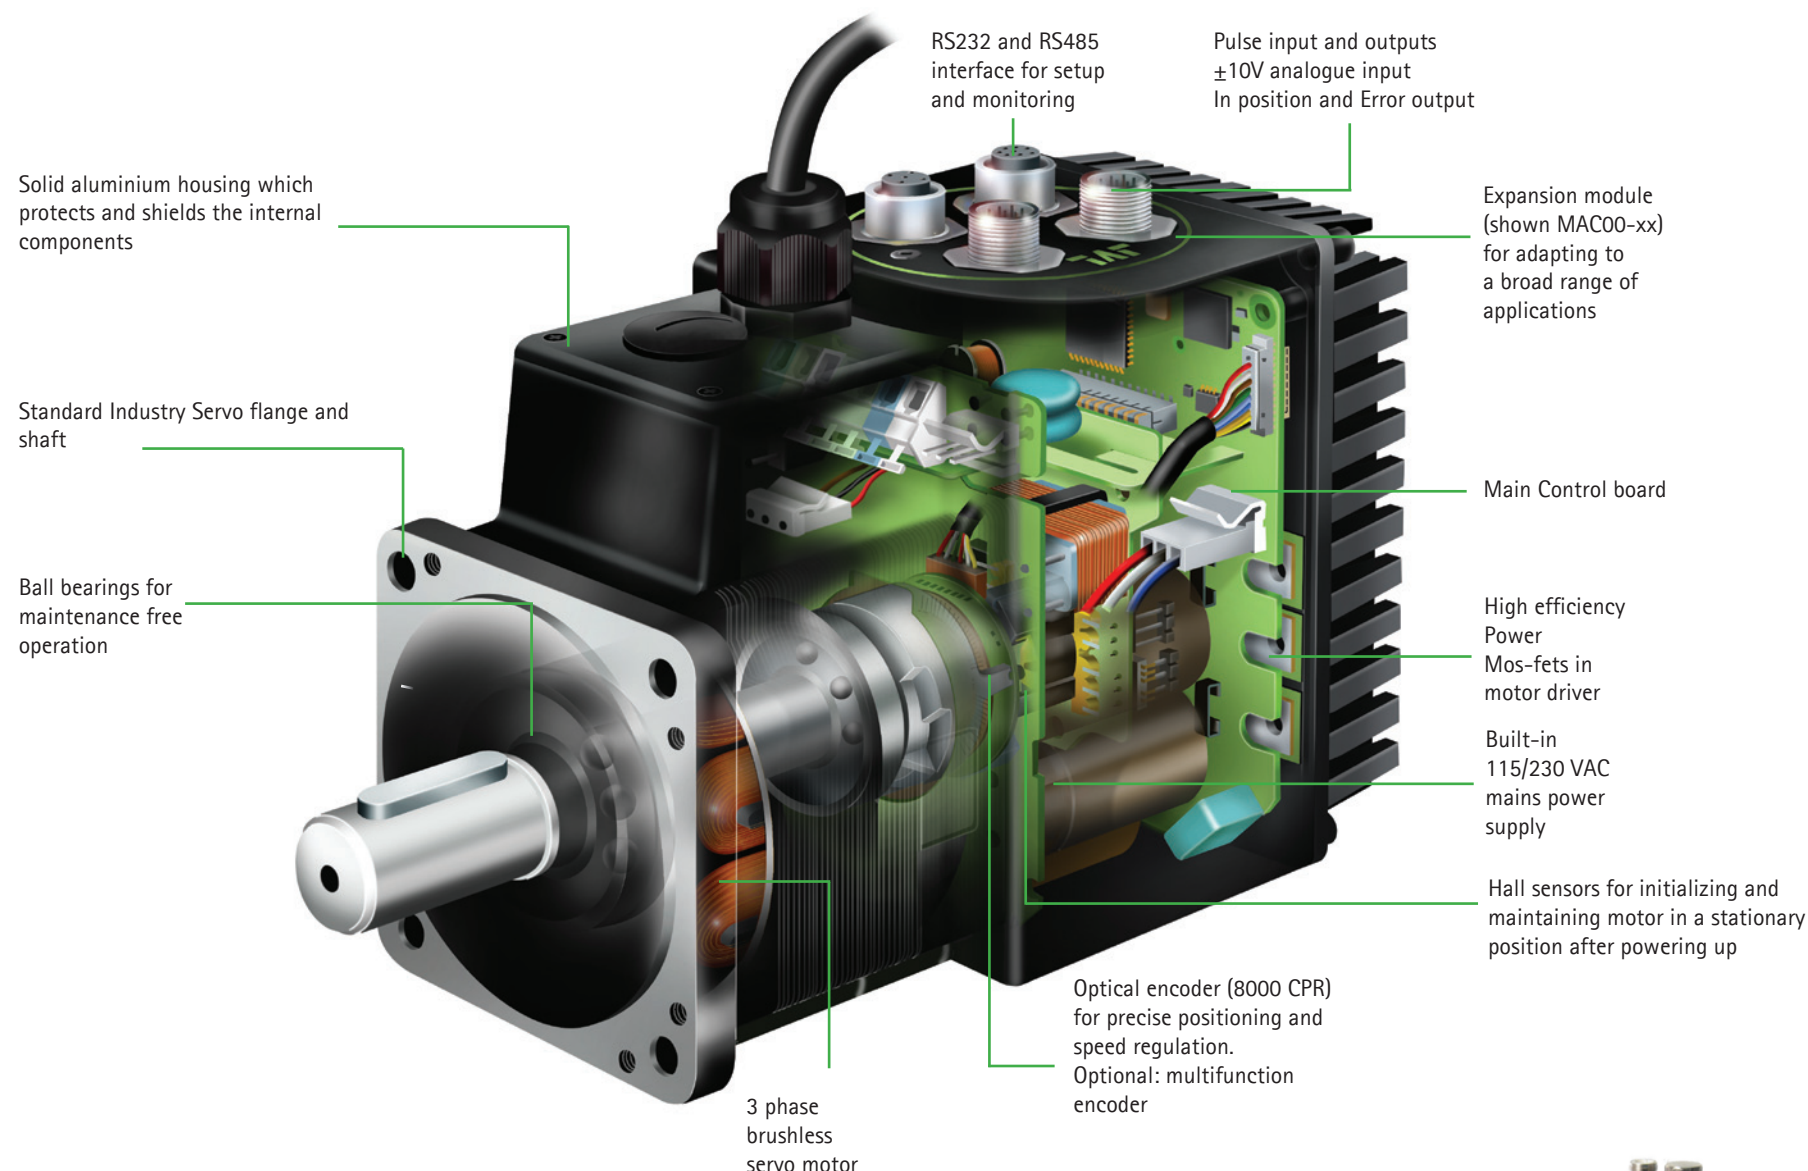

Built-in Brake

For applications in which motor position must be maintained at power-off, or for use in vertical applications, the 400 and 750W MAC motors can be supplied with a built-in brake

Gears


A wide range of planetary, worm and backlash free gears can be provided for the MAC motors

MAC1500 and MAC3000


Soon available. They will extend the MAC motor power range to 3000 W. Present series of expansion modules will still fit in these larger motors

MAC400


MAC400 for medium power ratings with incremental encoder or multi turn encoder for precise positioning and speed regulation

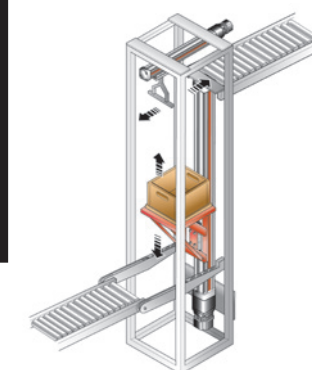


Material Handling Systems vertical and horizontal transfer movements



Slitting Machines. High speed traverse applications for slicing materials

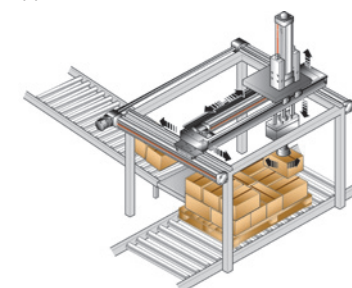

Auto Handling. High speed pick and place movements

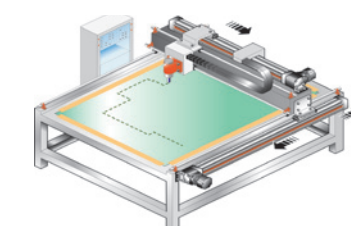

Profile Cutting Machines Intricate profile movements of water jets and laser cutters

Other applications

- Replacement for pneumatic solutions
- Replacement of step motors offering much faster response

and speed
 conveyor systems
 transfer machines
 3-D and XY tables
 Replacement for frequency inverters
 $\pm 10V$ speed/torque driver for external controllers
 Screw and toothed belt pick and place robots
 Labelling dispensers

Sold & Serviced By:

SERVO2GO.com

Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0249

sales@servo2go.com

www.servo2go.com

Software

JVL delivers the software that you need!

MacTalk

For setup, monitoring and diagnostics MacTalk is the preferred choice for most users.

Although advanced functionality is included, all operations are very intuitive and easy to use.

MacTalk allows you to adjust all vital parameters and save them in a file- or load them from a file. It is also possible to monitor parameters and motor status in real time.

When commissioning a system MacTalk even provides a convenient way to test and adjust your system. You can easily set up a test sequence and then adjust parameters like velocity, acceleration and torque. It is possible to select the distance moved and the delay between the moves. The more advanced 6th-order filter used in MAC motors, instead of a simple PID loop, is easily adjusted.

A nice feature is the Update function: if your PC is connected to the Internet you can update the MacTalk software itself – and even the servo system's firmware can be updated both the driver and the expansion module. Once bought, MacTalk will stay "fresh".

– always including the latest functionality.

Graphical Programming

The Nano PLC MAC00-Rx module can be programmed from MacTalk using userfriendly, icon-based commands in a graphical programming environment. With 8 inputs 4 outputs, all 5-24VDC, and one ±10V analogue input, a small PLC system can be programmed. It is register-based with different kinds of relative or absolute movements, Jump and IF commands, timer and other functions. It is possible to request input conditions and set outputs.

All register and parameters in the MAC motor can be accessed and changed if required.









OCX software




If your application is controlled by a PC you might prefer JVL's OCX software. The OCX (OLE Custom Controls – also known as ActiveX Controls) enables applications to be easily developed in for example:

- Visual Basic
- Visual C++
- Visual .NET
- Delphi
- Borland C++ Builder
- LabView
- Excel

any other environment supporting OCX controls.

Specifications

									
Technical specifications	MAC50	MAC95	MAC140	MAC141	MAC400-D2	MAC800-D2	MAC1500-D2	MAC3000-D2	Unit
Supply voltage	12-48VDC	12-48VDC	12-48VDC	12-48VDC	115/230VAC	115/230VAC	3x400VAC	3x400VAC	VAC
Speed range (nominal)	0-4000	0-4000	0-4000	0-2700	0-3000	0-3000	0-3000	0-3000	RPM
Rated power@4000/3000 RPM	46/0.062	92/0.124	134/0.18	134/0.18	400/0.54	746/1	1500/2	3000/4	W/hp
Cont. torque@tamb.-25°C	0.11/15.6	0.22/31.1	0.32/45.3	0.48/68	1.3/184.1	2.38/337.1	4.78/677	9.55/1352.4	Nm/oz-in.
Peak torque@tamb.-25°C	0.32/45.3	0.62/87.8	0.9/127.5	1.59/225.2	3.8/538.13	6.8/963	14.3/2025	28.6/4050.1	Nm/oz-in
Rotor inertia	0.075/0.0010	0.119/0.0017	0.17/0.0024	0.23/0.0033	0.34/0.0048	0.91/0.0129	6.26/0.0886	12.14/0.1719	kgcm²/oz-in-s²
Encoder resolution (standard)	4096	4096	4096	4096	8000/8192	8000	32767	32767	CPR
Absolute Encoder (Single / Turns)					8192/4096	8192/4096	8192/4096	8192/4096	CPR/Rev
Physical dimensions: MAC050-141 (dia x length) MAC400-3000 (wide x height x length)	Ø59x112/ 2.32x4.41	Ø59x131/ 2.32x5.16	Ø59x153/ 2.32x6.02	Ø59x172/ 2.32x6.77	60x114x191/ 2.36x4.48x7.52 with brake 60x114x224.5/ 2.36x4.48x8.84	80x115x175/ 3.15x4.53x6.89 with brake 80x115x207/ 3.15x4.53x8.15	130x200x182/ 5.12x7.87x7.16	130x200x232/ 5.12x7.87x9.13	mm/inch
Weight without exp. module	0.6/1.32	0.85/1.87	1.1/2.43	1.33/2.93	2.3/5.1	3.5/7.72	6.5/14.33	10.5/23.15	kg/lb
Protection class	IP42/IP67 optional				IP55 (IP66 on request)	IP55 (IP66 on request)	IP55 (IP66 on request)		
Flange	58.7x58.7/2.32x2.32				60x60/2.36x2.36	80x80/3.15x3.15	130x130/5.12x5.12		mm/inch
Shaft	Ø6.35/0.25 (other diameter on request)				Ø14/0.55	Ø19/0.75	Ø24/0.95		mm/inch

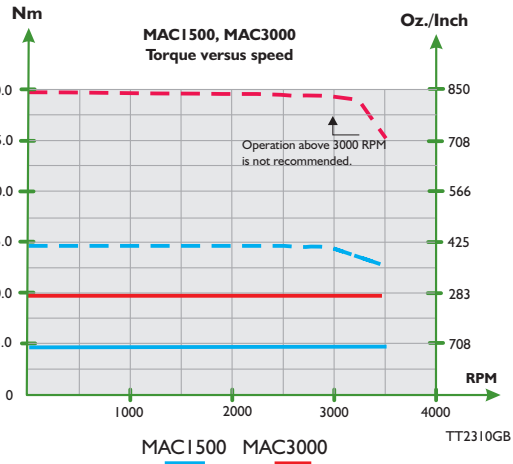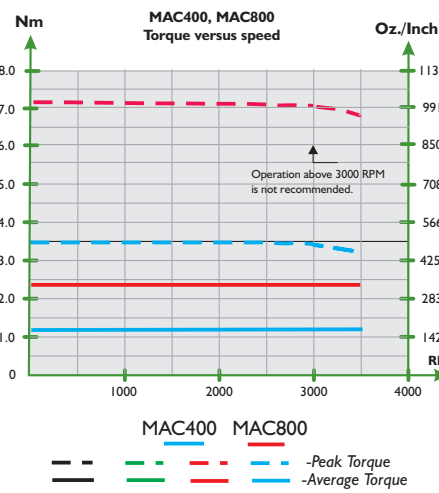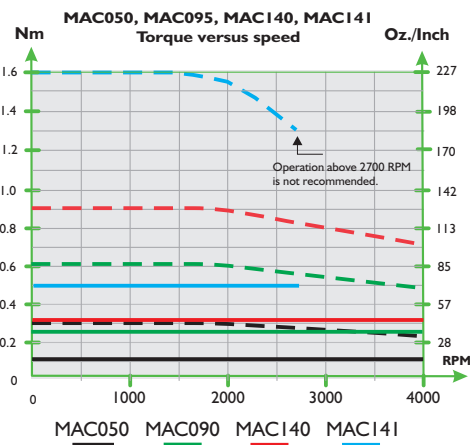

JVL Industri Elektronik A/S

JVL Industri Elektronik A/S is a modern company, located in Birkerød, just north of Copenhagen. The up-to-date development, research and production facilities of JVL employ only the latest technology for the development and production of electronic controls for step- and servo motors. More than 50% of the staff are engineers with a very high degree of experience and competence in the field of motion control. We can therefore offer a product

programme that includes all the necessary units and components to build up a complete motor control system. JVL is represented throughout Europe and Asia by independent agents and in USA by a sister company, JVL International ApS. In Germany we have our own offices, JVL Deutschland. All distributors are carefully selected by JVL to have the necessary knowledge and experience to help our customers in the best possible way in their choice of motion control components.

Sold & Serviced By:

SERVO2GO.com

Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0249

sales@servo2go.com

www.servo2go.com

LC0016-03GB

MAC motor® - Integrated Servo Motor



**A new way of saving money
All Electronics Inside**

*Brushless servo motors
with integrated controller*



Save Money and Troubles

In the past building up a motion control system was a complicated affair involving many components:

- PLC
- Indexer/controller
- Driver
- Motor with Encoder and Hall sensor
- A lot of cabling to connect all these items

-and finally complicated software that had to be programmed properly

It required a lot of expertise to make the system function and the installation was very time consuming and involved many sources that could create faults. Electrical noise from the cables carrying the high motor currents added to the problems.

JVL has reduced these problems to a minimum by introducing of the Integrated MAC motor on the motion control market.

In these motors the Indexer/controller, Driver, Encoder and Hall sensor are all built-in into one compact unit.


A software package, MacTalk, makes set-up extremely easy and expansion modules mounts directly into the motorhousing to adapt the motor to almost any application.

By investing in a modern integrated MAC motor from JVL you achieve the following benefits:

- Reduced material costs.
Because the drive and controller are in the motor, most cabling to a control panel is eliminated
- Reduced labor costs
With cabling eliminated, assembly time is greatly reduced
- Better quality and reliability
- Fewer connections, less wiring

- Ease of serviceability
Because all electronics are self-contained you simply change the motor
- Double supply facility to ensure that position and parameters are maintained after emergency stop
- Switching noise from the drive due to commutation is contained in the motor
- Reduced setup time
6th order digital filter requires only one tuning parameter for load or reflected inertia
- OEM cost savings, the modular approach means you only pay for the functionality required

Previous system build-up



Modern system build-up



TT2124GB

Sold & Serviced By:

SERVO2GO.com

Toll Free Phone: 877-378-0240

Toll Free Fax: 877-378-0249

sales@servo2go.com

www.servo2go.com