


IXARC Absolute Rotary Encoder

UCD-CA01B-1213-VAS0-PRM

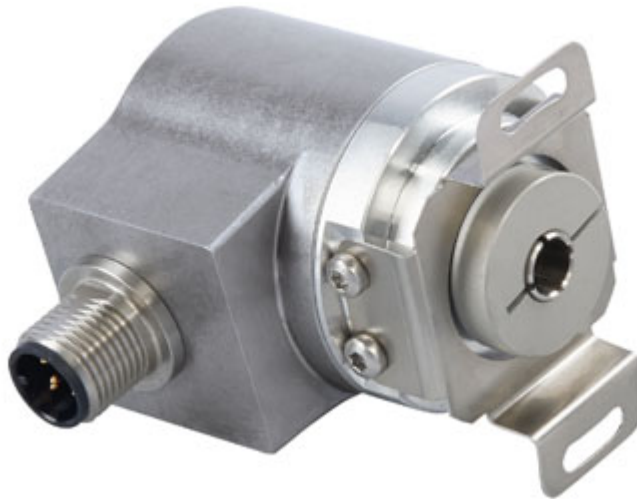

Interface

| | |
|-----------------------|---|
| Interface | CANopen |
| Profile | DS-406 |
| Features | Round Axis |
| Transmission Rate | min. 20 kBaud, max. 1 MBaud |
| Interface Cycle Time | ≥ 1 ms |
| Video Manual | ▶ Watch a simple installation video |
| Programming Functions | Resolution, preset, 2 limit switches, 8 CAMS, baud rate, CAN-Identifier, bootloader, transmission modes: polled, cyclic, sync |

Outputs

| | |
|---------------|---|
| Output Driver | Transceiver (ISO 11898), Galvanically Isolated by Opto-Couplers |
|---------------|---|

Electrical Data

| | |
|-----------------------------|-------------------|
| Supply Voltage | 9 - 30 VDC |
| Power Consumption | ≤ 1.2 W |
| Reverse Polarity Protection | Yes |
| Short Circuit Protection | Yes |
| EMC: Emitted Interference | DIN EN 61000-6-4 |
| EMC: Noise Immunity | DIN EN 61000-6-2 |
| MTTF | 240 years @ 40 °C |

Data Sheet

Printed at 10-11-2021 21:11

Sensor

| | |
|-----------------------|---|
| Technology | Magnetic |
| Resolution Singleturn | 13 bit |
| Resolution Multiturn | 12 bit |
| Multiturn Technology | Self powered magnetic pulse counter (no battery, no gear) |
| Accuracy (INL) | $\pm 0.0878^\circ$ (≤ 12 bit) |
| Code | Binary |

Environmental Specifications

| | |
|----------------------------|------------------------------------|
| Protection Class (Shaft) | IP65 |
| Protection Class (Housing) | IP65 |
| Operating Temperature | -40 °C (-40 °F) - +85 °C (+185 °F) |
| Storage Temperature | -40 °C (-40 °F) - +85 °C (+185 °F) |
| Humidity | 98% RH, no condensation |

Mechanical Data

| | |
|-------------------------------------|---|
| Connection Cap Material | None |
| Housing Material | Steel |
| Housing Coating | Cathodic corrosion protection (>720 hrs salt spray resistance) |
| Flange Type | Blind Hollow, \varnothing 36 mm / \varnothing 42 mm |
| Flange Material | Aluminum |
| Shaft Type | Blind Hollow, Depth = 18 mm |
| Shaft Diameter | \varnothing 10 mm (0.39") |
| Shaft Material | Stainless Steel V2A (1.4305, 303) |
| Friction Torque | ≤ 3 Ncm @ 20 °C (4.2 oz-in @ 68 °F) |
| Max. Permissible Mechanical Speed | ≤ 12000 1/min |
| Shock Resistance | ≤ 100 g (half sine 6 ms, EN 60068-2-27) |
| Permanent Shock Resistance | ≤ 10 g (half sine 16 ms, EN 60068-2-29) |
| Vibration Resistance | ≤ 10 g (10 Hz - 1000 Hz, EN 60068-2-6) |
| Length | 50,2 mm (1.98") |
| Weight | 180 g (0.40 lb) |
| Maximum Axial / Radial Misalignment | Static ± 0.3 mm / ± 0.5 mm; Dynamic ± 0.1 mm / ± 0.2 mm |


Electrical Connection

| | |
|------------------------|--------|
| Connection Orientation | Radial |
|------------------------|--------|

| | |
|-----------------|---------------------------|
| Connection Type | Cable / Connector |
| Connector | M12, Male, 5 pin, a coded |

Product Life Cycle

| | |
|--------------------|-------------|
| Product Life Cycle | Established |
| Approval | CE + cULus |

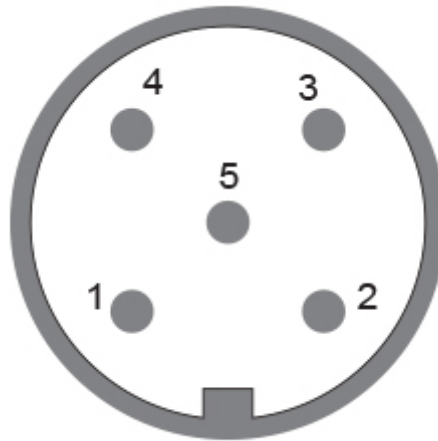

Connection Plan

| SIGNAL | PIN NUMBER |
|--------------|------------|
| Power Supply | 2 |
| GND | 3 |
| CAN High | 4 |
| CAN Low | 5 |
| CAN GND | 1 |

Connector-View on Encoder

Dimensional Drawing

[2D Drawing](#)

Accessories

Connectors & Cables

POS M12 5pin-A Female+5m PUR Cable

POS M12 5pin-A Female+2m PUR Cable

POS M12 5pin-A Female+10m PUR Cable

10m PUR Cable, 5pin, A-Coded, f IP69K

Data Sheet

Printed at 10-11-2021 21:11

M12, 5pin A-Coded, Female
More
Clamping Rings
Clamping Ring V12

Got questions? Need an individual solution? We are here to help!

Sold & Serviced By:



Canadian and International Sales

ELECTROMATE

877-737-8698

sales@electromate.com

www.electromate.com

U.S. Sales

SERVO2GO.com

877-378-0240

sales@servo2go.com

www.servo2go.com

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.